

A modern interior space with a white armchair and a large window overlooking a desert landscape. The room features a white pillar, a large window with white curtains, and a circular opening in the wall. The floor is light-colored, and the overall aesthetic is clean and minimalist. The text "2025 CATALOGUE" is overlaid on the image in white, bold, sans-serif font.

2025 CATALOGUE

WISTAR

WISTAR

22

THE COMPANY'S
22ND ANNIVERSARY

100+

PRODUCTS ARE SOLD TO
MORE THAN 100 COUNTRIES
AROUND THE WORLD

200+

THE COMPANY HAS
MORE THAN 200 PATENTED
TECHNOLOGIES

600+



THE COMPANY HAS
MORE THAN 600+
EMPLOYEES



TEXTILES & COMPONENTS

TBS Textiles & Components is the wholesale distributor of Wistar products in the SADC region. TBS Textiles & Components provides full support to cover warranties, technical architecture and project management on behalf of Wistar Mechanical and Electrical Technology co. Pty Ltd.

Wistar motors have obtained VDE, CUL, ROHS, REACH, FCC & CE certifications which conform to international requirements.

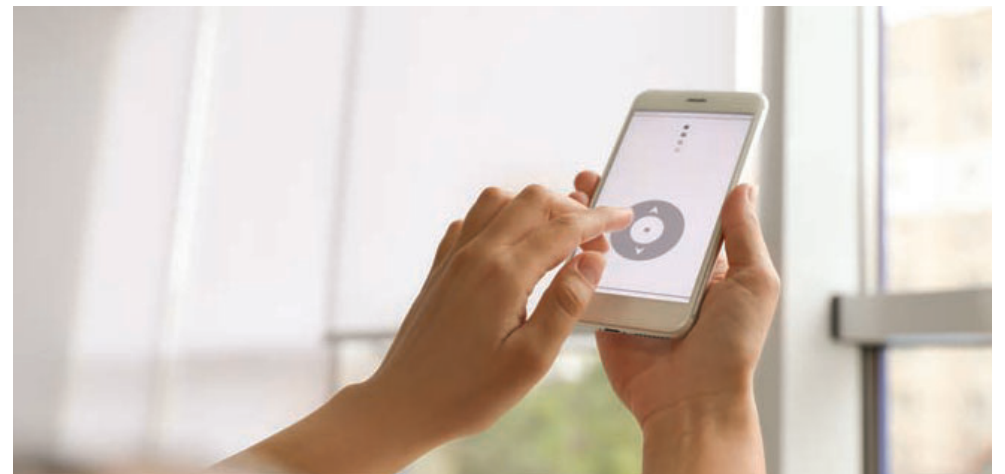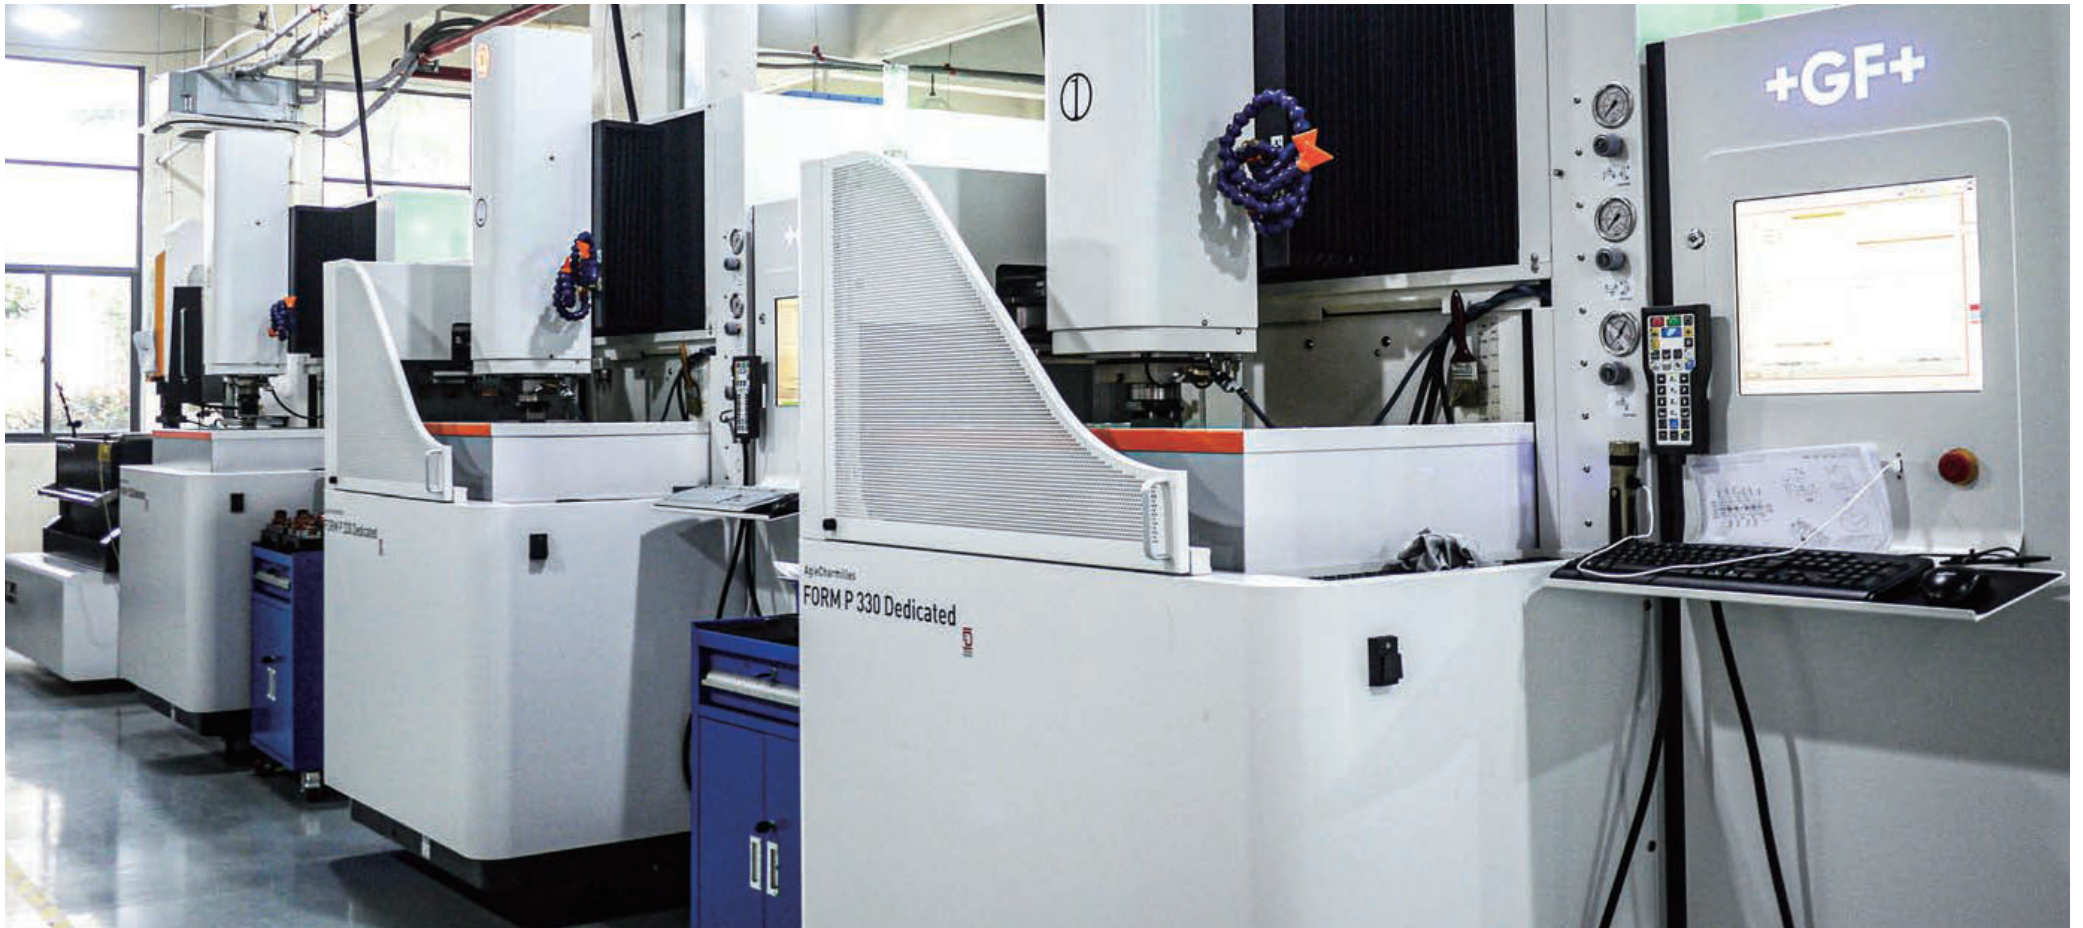

TUBULAR MOTORS



Used for Roller, Roman, Venetian, Pleated, Honeycomb & Zebra blinds, this versatile & popular solution is widely applied in offices, hotels, homes and other settings.





WSERD 24

24mm DC Tubular motor

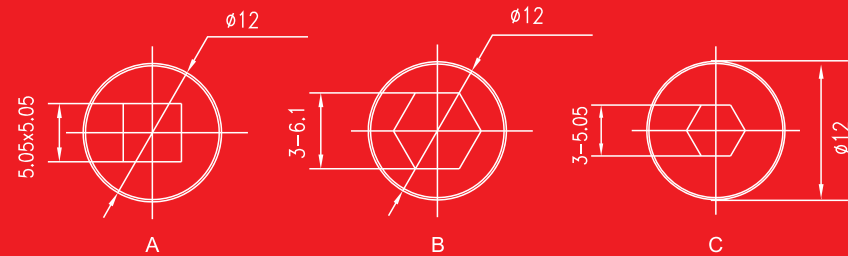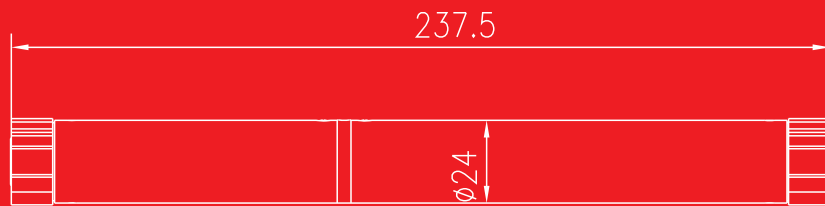

Patented motor



Super quiet



Upgraded output shaft



Adjustable speed control



Low consumption



Dual power supply




Pluggable smart module



Double shaft


✔ Power supply options



✔ Product applications





✔ Product certification
international standard

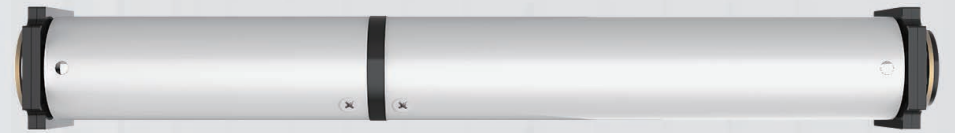


Motor model	Torque (Nm)	Rotating speed (R/MIN)	Input voltage (V)	Rated power (W)	Rated current (A)	Net weight (KG)	Total Length (mm)	Maximum turns (TURN)	Insulation level	Protection index (IP)	Running time (MIN)
WSERD24-DA-1.5/35	1.5	15/35	12	16.8	1.4	0.28	210	∞	CLASS B	IP20	12

WSERD 30


25mm DC Tubular motor

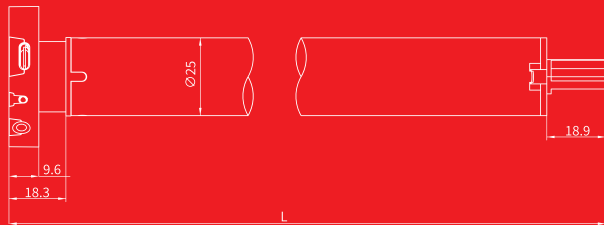



Head A



Head B



Head C

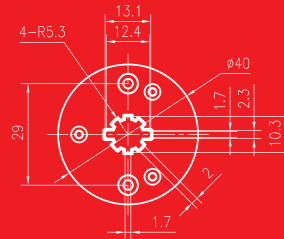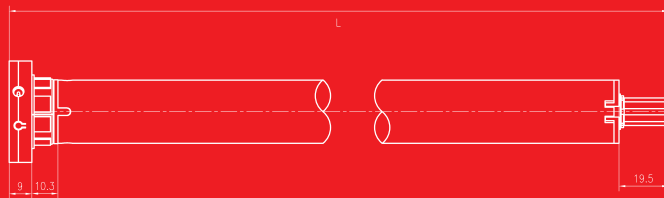

Patented motor



Super quiet



Lithium battery



Remote control



Solar panel charge




Type-C charge



Pluggable smart module



Intelligence platform support Product applications



Roller Blinds




Zebra Blinds

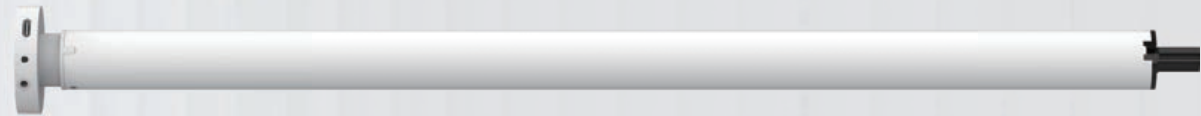

Motor model	Torque (N.m)	Rated speed (R/MIN)	Rated power (W)	Input voltage (V)	Battery capacity (mAh)	Rated current (A)	Protection index (IP)	Total length (mm)	Maximum turns (TURN)	Net weight (KG)	Running time (MIN)
WSERD30-2B-1.0N/30R	1.0	20/25/30	8.8	7.4	2200	1.2	IP20	452	∞	0.42	12
WSERD30-3B-1.2/35	1.2	25/30/35	10.6	11.1	2500	0.96	IP20	500	∞	0.67	12
WSERD30-3B-2.0/20	2.0	15/18/20	11.1	11.1	2500	1	IP20	500	∞	0.67	12

WSERD 40-B

35mm DC Tubular motor

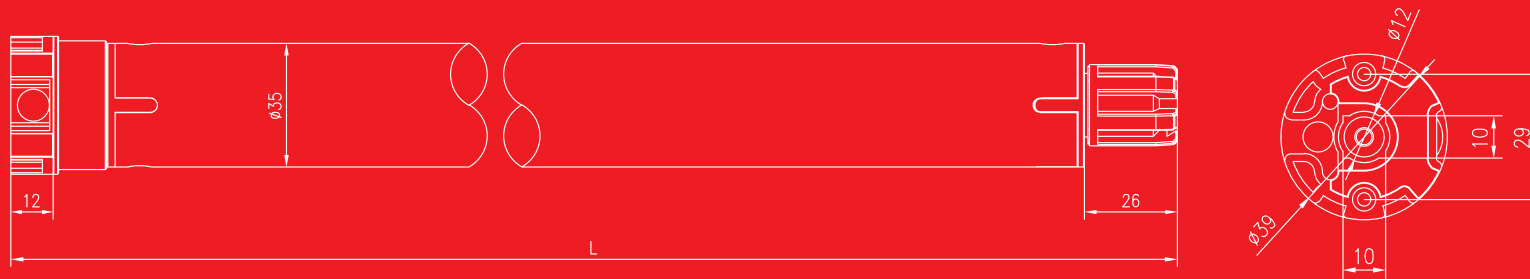

Patented motor



Super quiet



Lithium battery



Remote control



Solar panel charge





Recharger power supply




Adjustable speed control

Product certification
international standard


Product applications
series

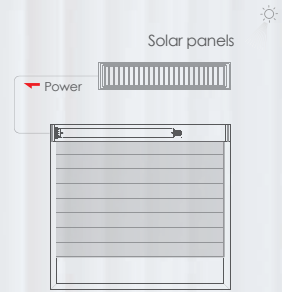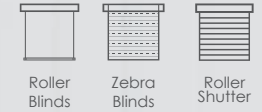


Solar panel charge
TYB004
Used in place of conventional power supply for energy saving & environmental protection.

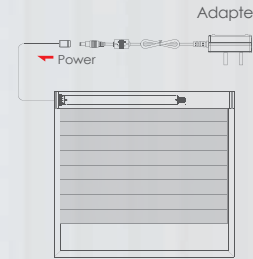

Adaptor charge
5V/1A
Easy operation and more stable

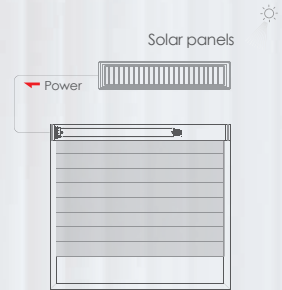

Solar panel charge
TYB006
Used in place of conventional power supply for energy saving & environmental protection.

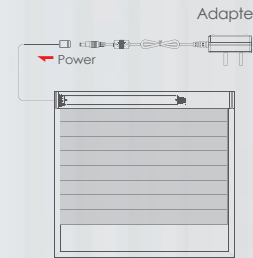

Adaptor charge
12.6V/0.9A
Easy operation and more stable







Motor model	Torque (Nm)	Rated speed (R/MIN)	Rated power (W)	Input voltage (V)	Battery capacity (mAh)	Rated current (A)	Running time (MIN)	Protection index (IP)	Total Length (mm)	Maximum turns (TURN)	Net Weight (KG)
WSERD40-B-5/28	5	20/24/28	60	12	2500	5.0	12	IP44	600	∞	1.40

WSERD 40-T Zero Gap

COMING SOON

35mm DC Tubular motor

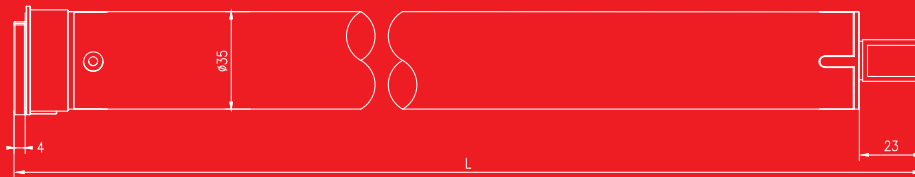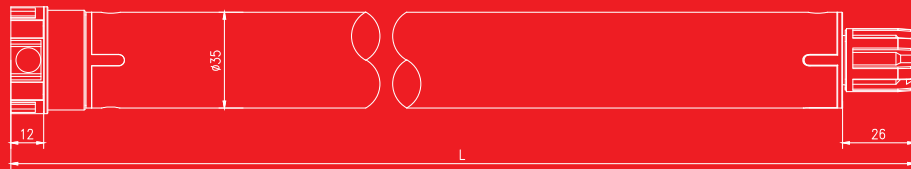

Super quiet



Remote control



100V~240V power supply



Tilting to adjust light




Low consumption


Structure view



Product applications series

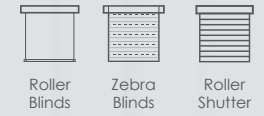


Product certification international standard



Motor model	Torque (N.m)	Rated speed (R/MIN)	Rated power (W)	Input voltage (V)	Input current (A)	Running time (MIN)	Protection index (IP)	Total Length (mm)	Maximum turns (TURN)	Net weight (KG)
WSERD40-T-5/28	5	20/24/28	42	100-240	0.23	12	IP44	530	∞	1.2

WSERD 50-B Outdoor - Zip Screen

45mm DC Tubular motor

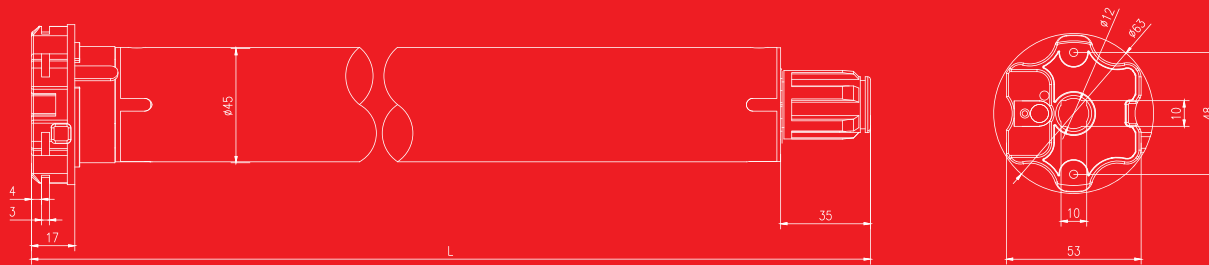

Super quiet



Lithium battery



Remote control



Solar panel charge




Recharger power supply

Adaptor charge

5V/1A


Easy operation
and more stable

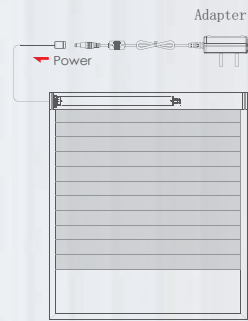


Solar panel charge

TYB004

Used in place of conventional
power supply

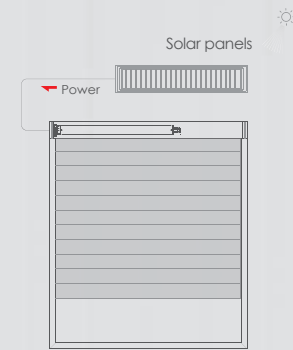

✔ Product applications
series

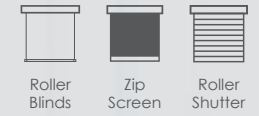

✔ Product certification
international standard


CE CCC RoHS REACH



Motor model	Torque (N.m)	Output speed (R/MIN)	Rated power (W)	Rated voltage (V)	Battery capacity (mAh)	Rated current (A)	Running time (MIN)	Protection index (IP)	Total length (mm)	Maximum turns (TURN)	Net weight (KG)
WSERD50-B-20/12	20	12	96	12	9600	8	12	IP44	620	∞	2.81

WSERD 50-L

45mm DC Tubular motor

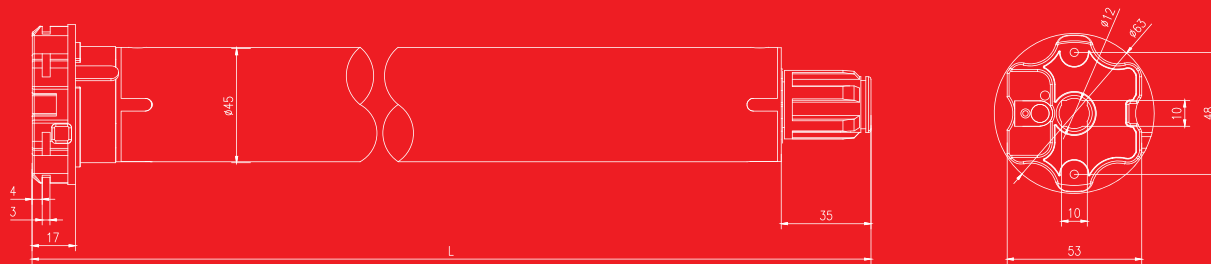

Super quiet



External batter powered



Remote control




Solar panel charge



Low consumption


Adaptor charge
12.6V/0.9A

Easy operation & more stable.

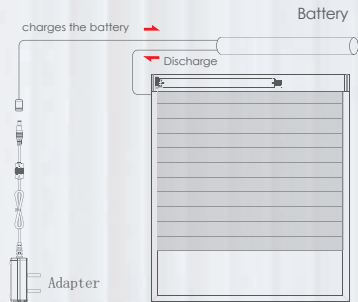


Solar panel charge
TYB002

Used in places without accessible power supply. Eco-friendly & economical.

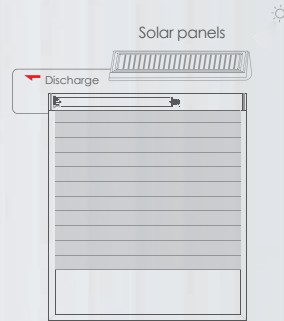


Solar panel charge
TYB006

Used in places without accessible power supply. Eco-friendly & economical.

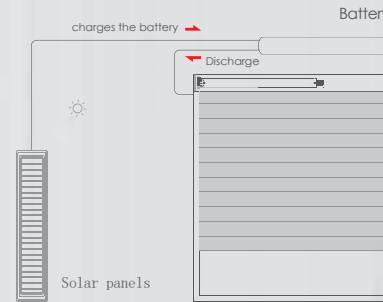

✔ Product applications
series

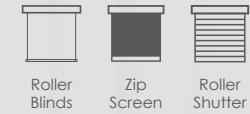


✔ Product certification
international standard



Motor model	Torque (N.m)	Output speed (R/MIN)	Rated power (W)	Rated voltage (V)	Rated current (A)	Running time (MIN)	Protection index (IP)	Total length (mm)	Maximum turns (TURN)	Net weight (KG)
WSERD50-L-20/12	20	12	60	12	5.0	12	IP44	580	∞	2.40

WSEB 50

45mm AC Tubular motor

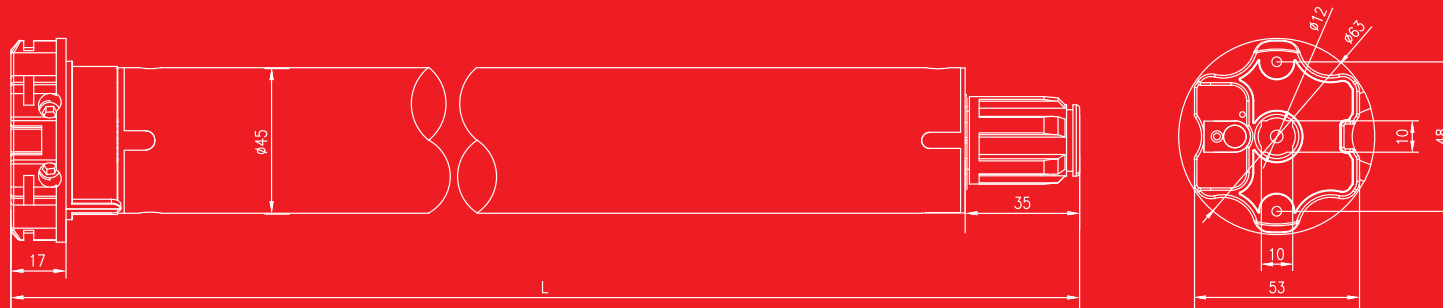

Mechanical
limit switch



Tilting to
adjust light



Remote
control


Structure view



Product certification




Product applications
series

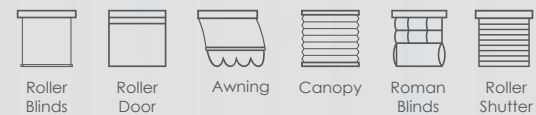

Motor model	Torque (N.m)	Output speed (R/MIN)	Rated power (W)	Rated voltage (V)	Rated current (A)	Running time (MIN)	Protection index (IP)	Total length (mm)	Maximum turns (TURN)	Net weight (KG)
230V/50Hz										
WSEB50-10/27	10	27	203	230	0.84	4	IP44	570/600	27/40	2.25
WSEB50-15/17	15	17	174	230	0.72	4	IP44	570/600	27/40	2.28

WSER 50

45mm AC Tubular motor

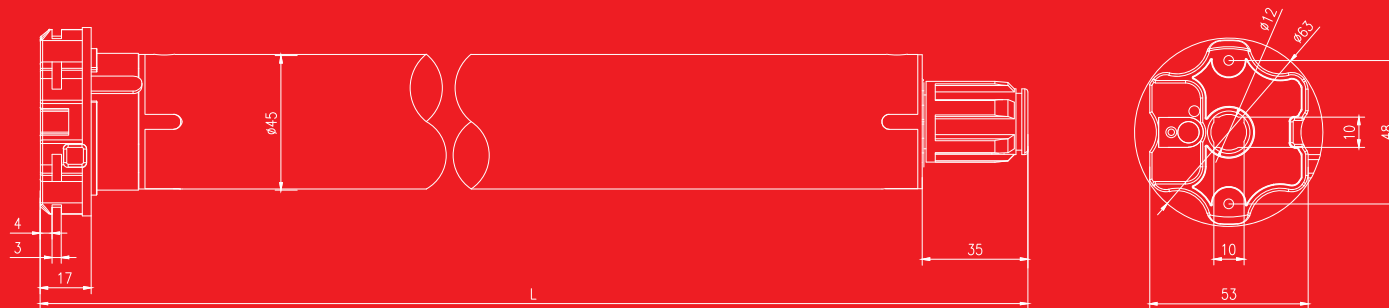

Electronic limit switch



Tilting to adjust light



Remote control



Third limit function



Structure view



Product certification



 Product applications
series

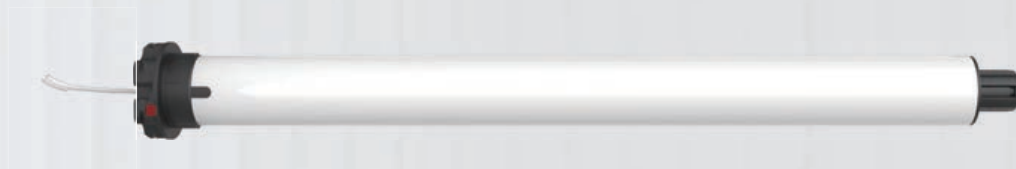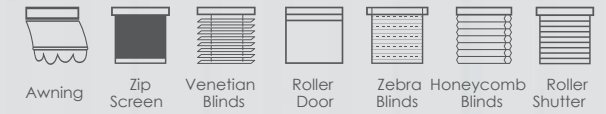


Motor model	Torque (N.m)	Output speed (R/MIN)	Rated power (W)	Rated voltage (V)	Rated current (A)	Running time (MIN)	Protection index (IP)	Total length (mm)	Maximum turns (TURN)	Net weight (KG)
230V/50Hz										
WSER50-10/27	10	27	203	230	0.84	4	IP44	570	∞	2.30
WSER50-15/17	15	17	174	230	0.72	4	IP44	570	∞	2.33

APPLICATION SOLUTION

WSER50 + External Manual Switch

5 wires (2 wires connect to external manual switch)

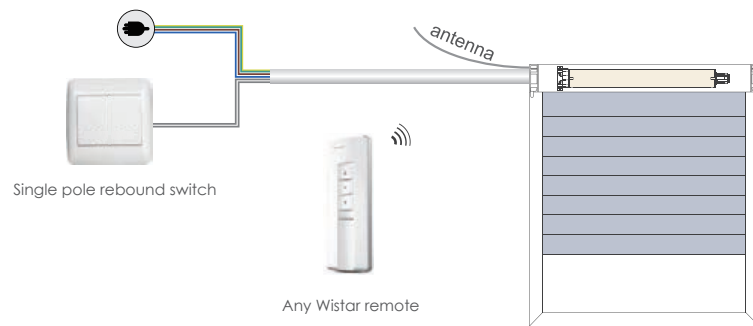


WSER50 / Dry Contact Closure

6 wires with dry contact closure




Note: The Home Automation Control System is 3rd party's products, not supplied by Wistar

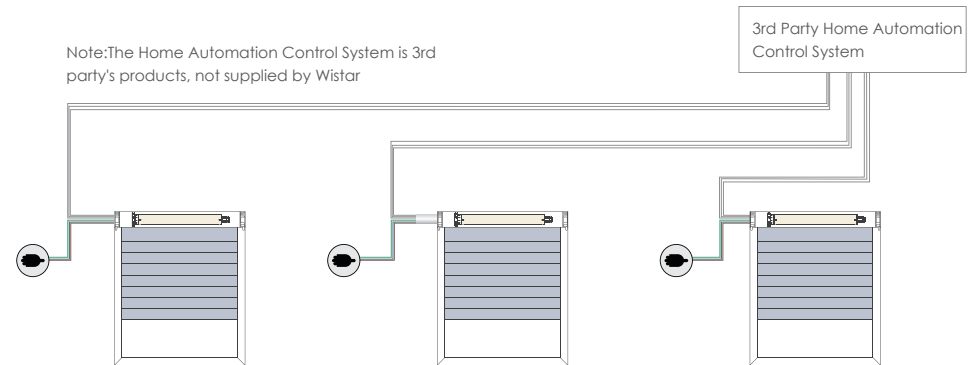

WSER50 / Shutter


Obstacle detection program

Two options: Obstacle Detection Stop/Obstacle Detection Rebound
Upward Obstacle-stop Function



If the shutter is frozen in winter, or rusted after rains, the motor can automatically detect the resistance in upwards and stop working so as to protect the shutter's profiles.

Downward Obstacle-detection Function

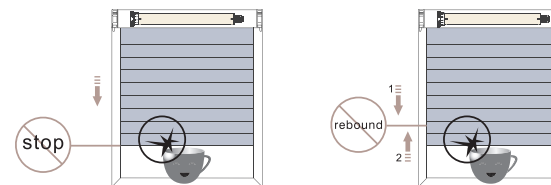

If the shutter meets something beneath, the motor could detect automatically and stop working or bounce upwards to avoid crushing. The Downward Obstacle-stop function can be realized by two ways: one is stop when meeting obstacle; the other is bounce upwards when meeting obstacle.

✓ WSER50 / Awning




Awning program

Fabric Length Compensation & Soft Closing & Torque Adjustment

Emitter is blocked from functioning if awning is closed upon sensor's command.



Any Wistar remote

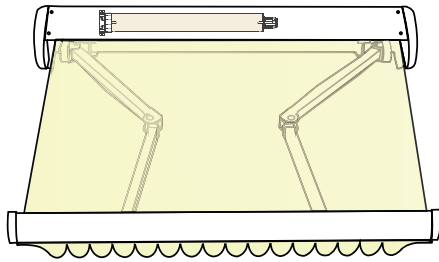

Constant radio link between sensor and motor to ensure high safety of the awning

Light sensor can be switched between activation and deactivation by remote

Sensor Control for Awning



WRS005

WRS002

WRS001


Set Inner Limit Position automatically



Inner Limit position is set automatically after the 1st running



Soft closing during the awning retract so as to avoid harsh hitting the cassette

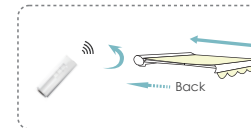


Fabric length compensation to ensure straight and elegance look of the awning


✓ WSER50 / Zip Screen

Screen program

A. During motor running downward, every time it detects obstacle, the motor will stop running down but run upward for 180 degrees, then run downward again. If it detects obstacles three times at the same position (position difference less than 6cm), the motor will run upward for 180 degrees and stop running.

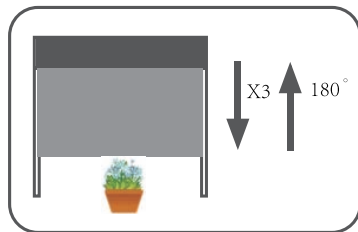


B. During motor running downward, every time it detects obstacle, the motor will stop running down but run upward for 180 degrees, then run downward again. If it detects obstacles three times at different positions (position difference bigger than 6cm), the motor will run upward to TOP limit.

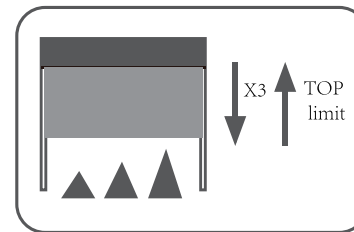

C. The obstacle detection function can be switched between ON and OFF by remote

WSER 50-WIFI

45mm AC Tuya WiFi Tubular Motor

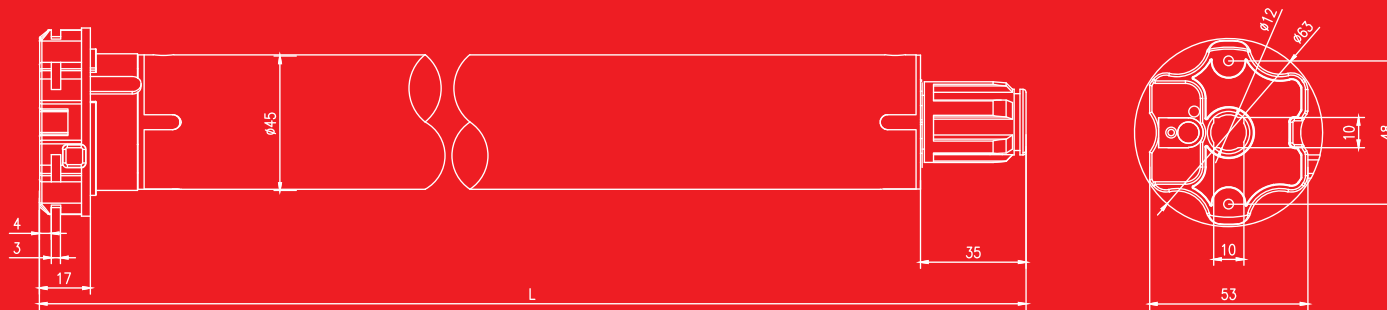

Electronic limit switch



Tilting to adjust light



Remote control



Third limit function



Pluggable WiFi module

Structure view





Apps supported



Product certification



Product applications
series

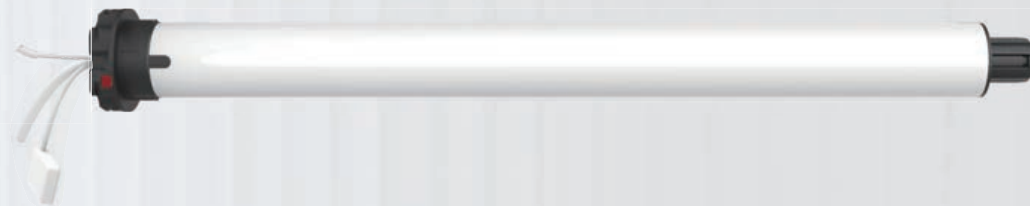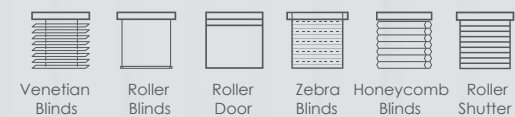

Motor model	Torque (Nm)	Output speed (R/MIN)	Rated power (W)	Rated voltage (V)	Rated current (A)	Running time (MIN)	Protection index (IP)	Total length (mm)	Maximum turns (TURN)	Net weight (KG)
230V/50Hz										
WSER50-10/27	10	27	203	230	0.84	4	IP44	570	∞	2.30
WSER50-15/17	15	17	174	230	0.72	4	IP44	570	∞	2.33

CURTAIN MOTORS


Intelligence platform
support



Rokid




tuya

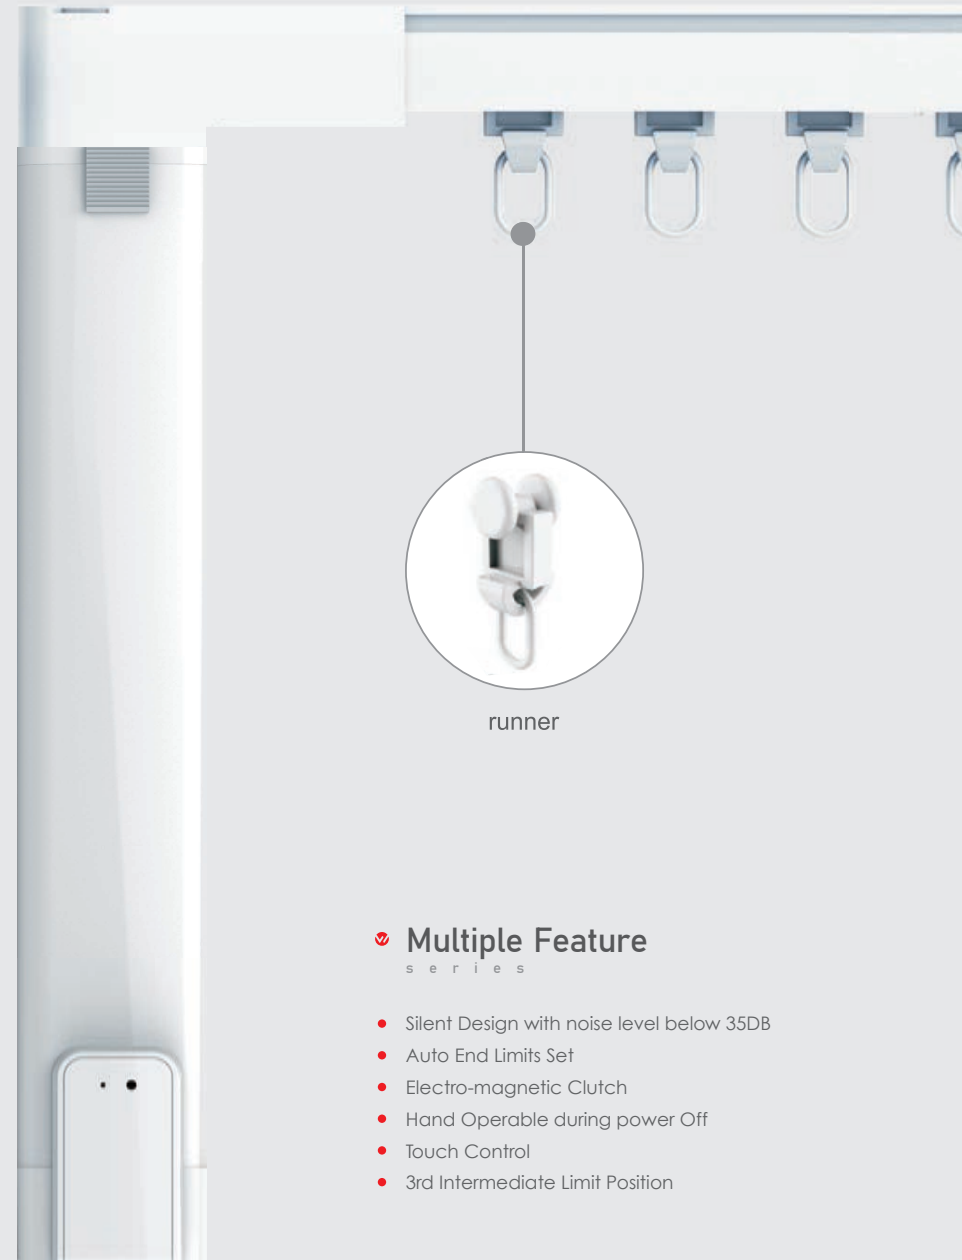


runner

Multiple Feature series


- Silent Design with noise level below 35DB
- Auto End Limits Set
- Electro-magnetic Clutch
- Hand Operable during power Off
- Touch Control
- 3rd Intermediate Limit Position

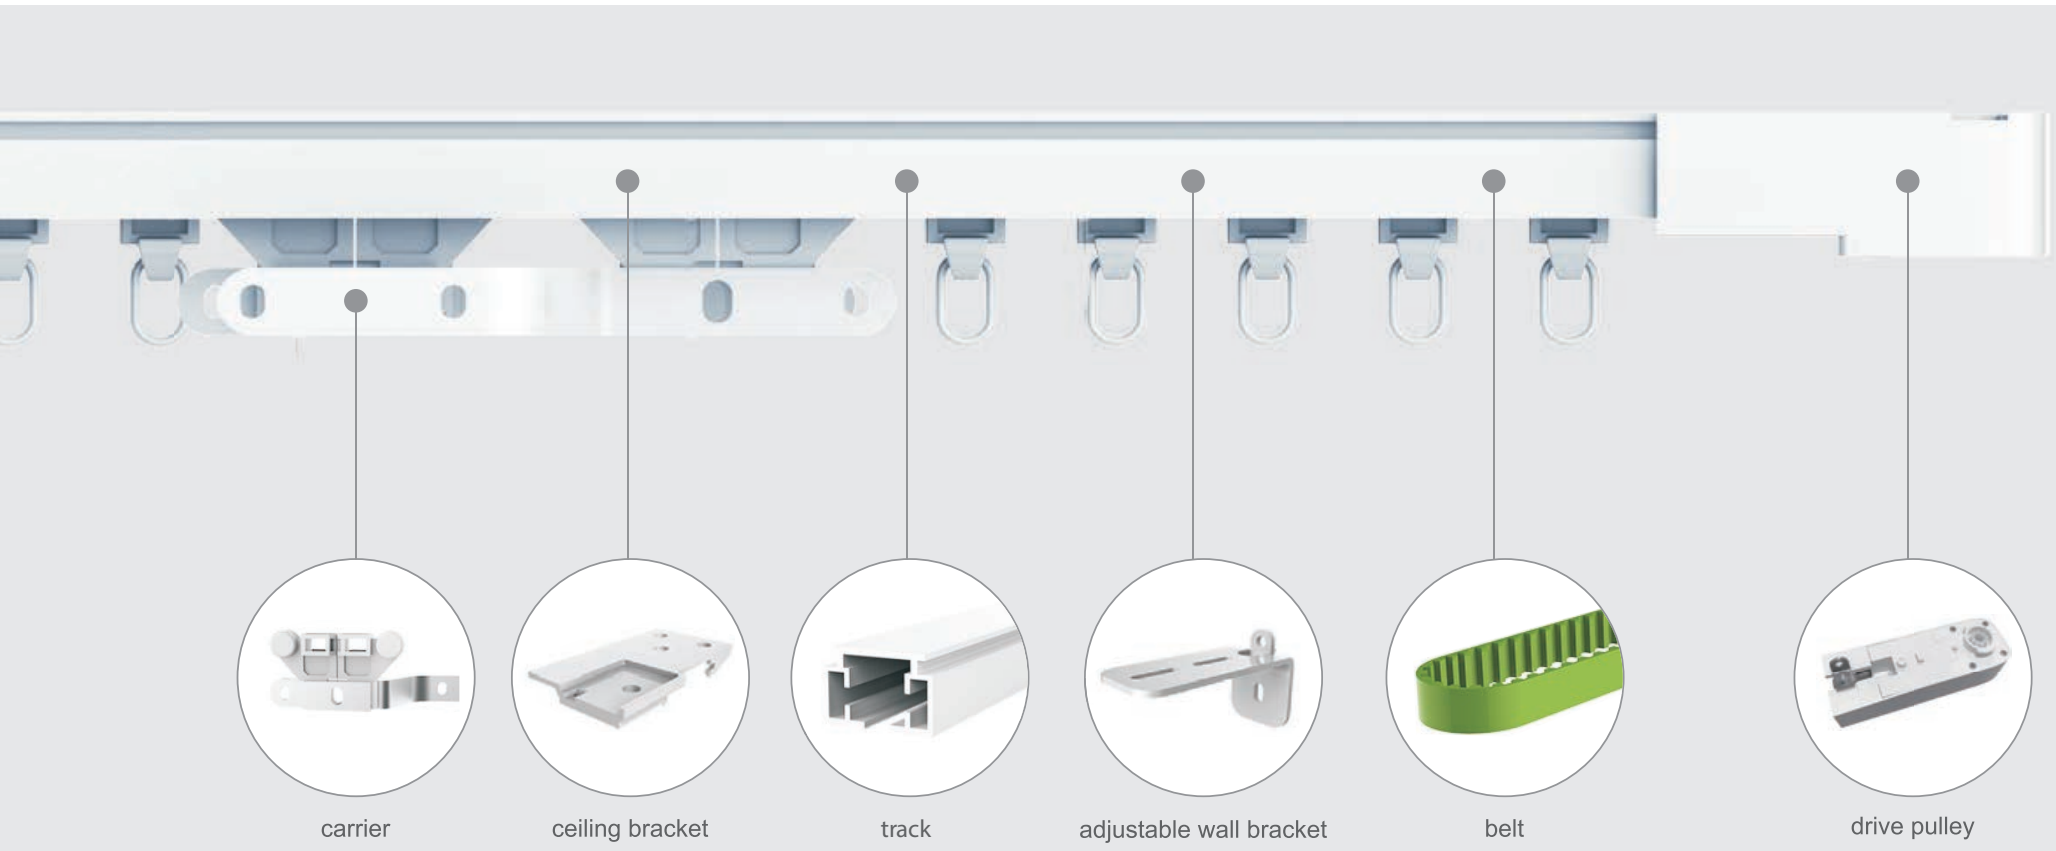

carrier




ceiling bracket



track



adjustable wall bracket




belt




drive pulley

✓ **Two Curtain System**
series



Standard Track



Wave Track

✓ **Installation Option**
series



Motor can be installed on the left or right side and change according the site situation.

WSCMQ-WIFI

AC motor with pluggable intelligent control module



High torque



Super quiet



Auto limit setting



Patented head for easy installation



Adjustable speed control



Obstacle detection



Soft start and soft stop



Pluggable intelligent control module



✔ Product applications series



Standard Curtain



Wave Curtain




Lift Curtain

✔ Product certification series



✔ Intelligence platform support



Motor model	Torque (N.m)	Output speed (CM/S)	Rated voltage (V)	Frequency (Hz)	Rated power (W)	Rated current (A)	Net weight (kg)	Motor length (mm)	Insulation level	Protection index	Working Temperature	Power cord	Module Replaceable	Dry contact control	Strong current control	Room card control	Remote control
WSCMQ-1.2/12	1.2	12	100~240	50/60	18	0.08	0.77	311	CLASS B	IP40	-10℃~60℃	3 wires	•				•

WSCMT-RS485

AC motor with pluggable intelligent control module with RJ11 interface



High torque



Super quiet



Auto limit setting



Patented head for easy installation



Touch control



Obstacle detection



Soft start and soft stop



Hand operation during power-off



✔ Product applications series



✔ Product certification series



✔ Intelligence platform support



KNX
RJ11 interface



Motor model	Torque (N.m)	Output speed (CM/S)	Rated voltage (V)	Frequency (Hz)	Rated power (W)	Rated current (A)	Net weight (kg)	Motor length (mm)	Insulation level	Protection index	Working Temperature	Power cord	Dry contact control	Strong current control	Room card control	Remote control
WSCMT-2/12	2	12	100~240	50/60	36	0.16	0.8	322	CLASS B	IP40	-10°C~60°C	3 wires	•			•

WSCMI - ZigBee

DC motor with external rechargeable battery



Lithium batter
powered



Patented
head



Super
quiet



Wireless for
easy installation



Hand operable
speed control



Adjustable
speed control



Obstacle
detection



Auto
limit setting



✔ Product applications series



Standard Curtain



Wave Curtain



Lift Curtain

✔ Product certification series



✔ Intelligence platform support



Battery DCB007



Motor model	Torque (N.m)	Output speed (CM/S)	Rated voltage (V)	Frequency (Hz)	Rated power (W)	Rated current (A)	Net weight (kg)	Motor length (mm)	Insulation level	Protection index	Working Time	Lithium battery powered	Tuya ZigBee	Remote control
WSCMI-2/12	2	9/12/14	12	/	48	4	0.66	258	CLASS B	IP40	S2: 12min	•	•	•

VERTICAL BLINDS





WSCMXH

Dual motors one for tilting, the other for lifting,
max track length 12m



Replaceable
smart module



Adjustable
speed control



Super
quiet



Soft start
and soft stop



Touch
control



Tilting to
adjust light



Obstacle
detection




Auto
limit setting



Wireless

✔ Product applications series



✔ Product certification series




✔ Intelligence platform support



Motor model	Torque (N.m)	Output speed (CM/S)	Rated voltage (V)	Frequency (Hz)	Rated power (W)	Rated current (A)	Net weight (kg)	Motor length (mm)	Insulation level	Protection index	Working Temperature	Power cord	Module Replaceable	Remote control
WSCMXH	1.2	9/12/14	100~240	50/60	18	0.08	0.79	278	CLASS B	IP40	-10℃~60℃	3 Wires	•	•

REMOTE CONTROLS

We have various elegant control systems that allow ease of operation.

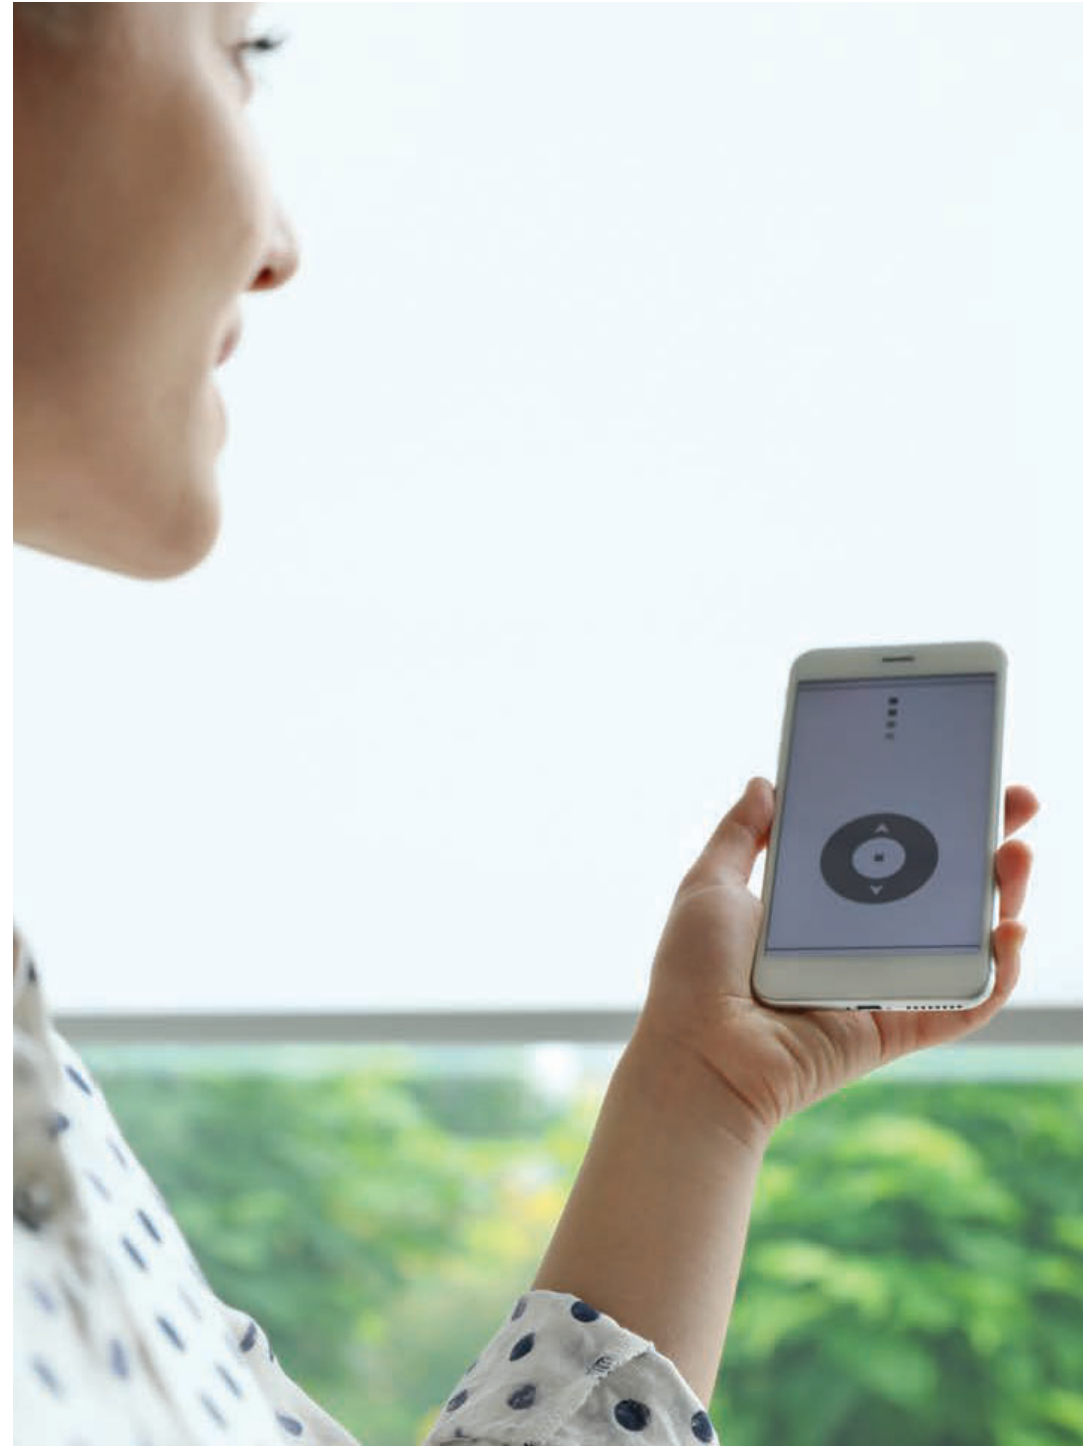



WSXE 3

Emitter



Strong signal



Comfortable matte texture



Laser engraving



Timer switch



Responsive buttons



Single / group control free switching

Product name: Hand-held emitter

Frequency: 433.92MHz

Accessories: Equipped with wall-mounted bracket

Transmission distance: 100m

Dimension: 120mmX 43mmX 12mm

Power supply: 1 unit 3V battery CR2032

Battery life: 2 years (nominal capacity: 210mAh)

Code: Rolling code



● Single channel



● mounting bracket



WSXE 301

Single channel

- ✔ Single channel



WSXE 302

Four channels

- ✔ Single control group
- ✔ control free switching



WSXE 303

Sixteen channels

- ✔ Single control group
- ✔ control free switching



WSXE 303-4T

Four channels with timer

- ✔ Single control group
- ✔ control free switching
- ✔ Automatic timer control: 8 pairs of open & close time to enable automatic timer control
- ✔ Daily timer program: set different open & close time for each single day in a week
- ✔ Weekly timer program: set same open & close time for a week or for weekdays
- ✔ Keep memory even in power failure

WSXE 4

Emitter



Strong
signal



Sensitive
button



Dual-channel
remote

Product name: Wall-mounted emitter

Frequency: 433.92MHz

Accessories: Equipped with wall-mounted bracket

Transmission distance: 100m

Dimension: 86mmX 486mmX 11mm

Power supply: 1 unit 3V battery CR2032

Battery life: 2 years (nominal capacity: 210mAh)

Code: Rolling code





WSXE 402

Double channels

Single control group
control free switching



WSXE 403

Five Channels

Single control group
control free switching

WSRE 7

Emitter



Strong signal



Wheel dimming



Comfortable matte texture



Special for single control



Responsive buttons



Single / group control free switching

Product name: Hand-held emitter

Frequency: 433.92MHz

Accessories: Equipped with wall-mounted bracket

Transmission distance: 100m

Dimension: 130mmX 47mmX 15mm

Power supply: 1 unit 3V battery CR2430

Battery life: 2 years (nominal capacity: 210mAh)

Code: Rolling code



WSRE 703V

Six channels

- Tilt Wheel
- Side button to adjust motor running speed

WSXE 11

Emitter



Strong signal



Sun texture craft



Long service life



Responsive buttons



Single / group control free switching

Product name: Hand-held emitter

Frequency: 433.92MHz

Accessories: Equipped with wall-mounted bracket

Transmission distance: 100m

Dimension: 132mmX 45mmX 11mm

Power supply: 2 units AAA Batteries

Battery life: 2 years (nominal capacity: 210mAh)

Code: Rolling code



WSXE 1103-4T

Four channels with timer

- ✔ Four channels with timer
- ✔ Single / group control free switching

For WSCMI



- Output Power :66.6W
- Nominal capacity:2500mAh
- Protection Index :IP40
- Dimension : 26.7*22.7*260mm
- Lifetime : Charge-discharge 500 times
- Power : 27Wh
- Charging voltage 16.8V/1A
- Working temperature :-10°C~60°C

For WSERD40-L



- Output Power :66.6W
- Nominal capacity:2500mAh
- Protection Index :IP55
- Dimension : \varnothing 28*320mm
- Lifetime : Charge-discharge 500 times
- Power : 21Wh
- Charging voltage 12.6V/0.9A
- Working temperature :-10°C~65°C

For WSERD50-L



- Output Power :88.8W
- Nominal capacity:5000mAh
- Protection Index :IP55
- Dimension : \varnothing 28*510mm
- Lifetime : Charge-discharge 500 times
- Power : 42Wh
- Charging voltage 12.6V/0.9A
- Working temperature :-10°C~65°C


Used in places without accessible power supply
Converting solar energy into electrical energy
Eco-friendly and economical



Solar panel for WSERD40-B, DCB008, DCB009



- Output Power :4W
- Protection Index :IP55
- Dimension : 524*65*6mm
- Working temperature :-10°C~65°C

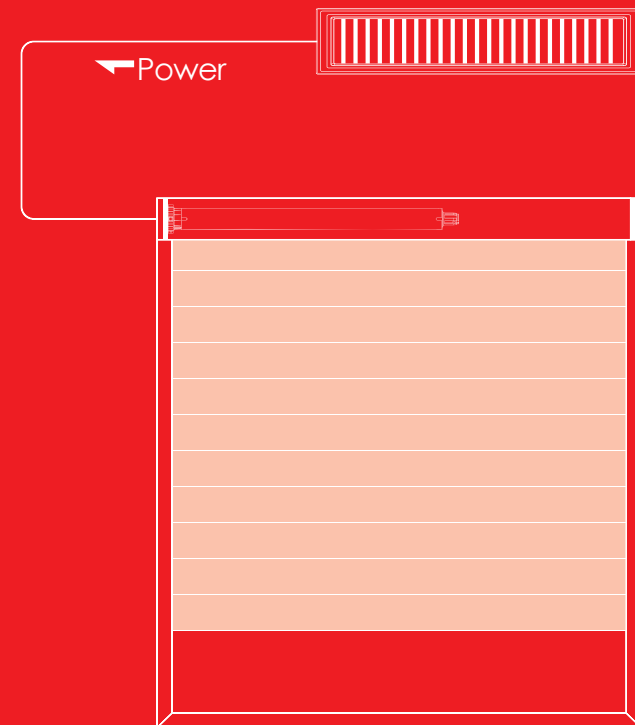

SMART HOME SOLUTIONS

From single products to full house smart solutions, we embrace cutting-edge technology. The Wi App is now available for download on Apple and Android devices.






MATTER

Over Thread Protocol

Product Advantages


- ✔ Strong compatibility and high interoperability: same protocols and data form, Matter devices could be controlled together with other smart devices via different platforms.
- ✔ High security: built-in multi-layer security mechanisms, such as encrypted communication, authentication, and access control, etc. matter devices can effectively ensure the security and privacy of users' data.
- ✔ Strong scalability: Matter standard is still in open state, which can access unlimited smart products and unlimited imagination in the near future.

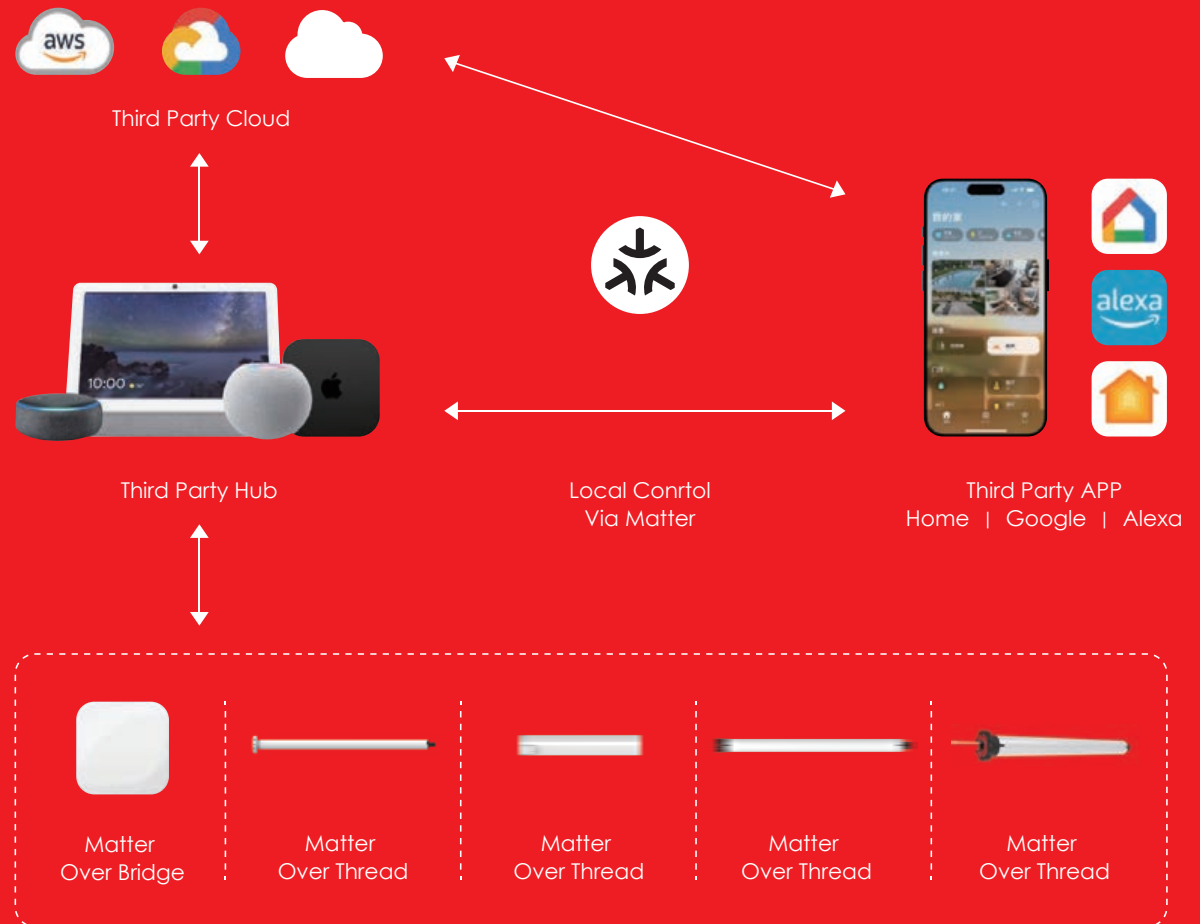

ZIGBEE Protocol

Product Advantages


- ✔ Low power consumption:
ZigBee consumes significantly less energy than other wireless communication technologies. In general, the power required for ZigBee transmission processing is 1mW. If ZigBee goes to sleep, it will require less
- ✔ Short latency:
ZigBee has a fast response time, generally only 15 ms from sleep to working state, and only 30 ms for nodes to connect to the network, further saving power.
- ✔ Short distance:
The transmission range is generally between 10m and 100m, and can also be increased to 1-3 km after increasing the RF transmission
- ✔ Safety and reliability:
ZigBee provides a very complete range of inspection capabilities, while at the same time requiring repeated inspection processes when applying ZigBee. In this way, the safety and reliability of ZigBee are effectively

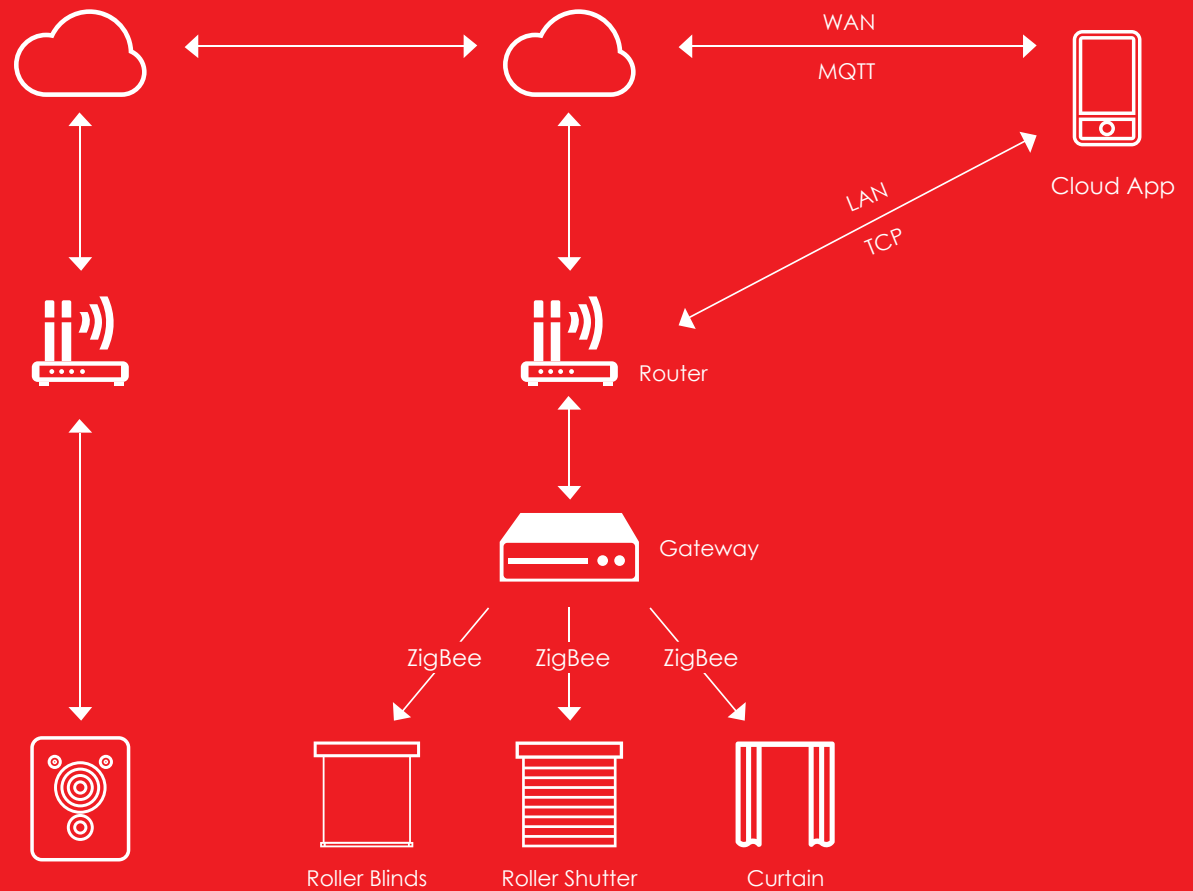

GW03 Gateway

Product Feature


- ✔ Each gateway can connect up to 47 devices
- ✔ Type-C interface, 5V/1A power supply
- ✔ Dimensions: 98mm×98mm×22mm
- ✔ Local control and control in distance via Tuya Smart or Smart Life
- ✔ The devices to be connected must be protocol of 433

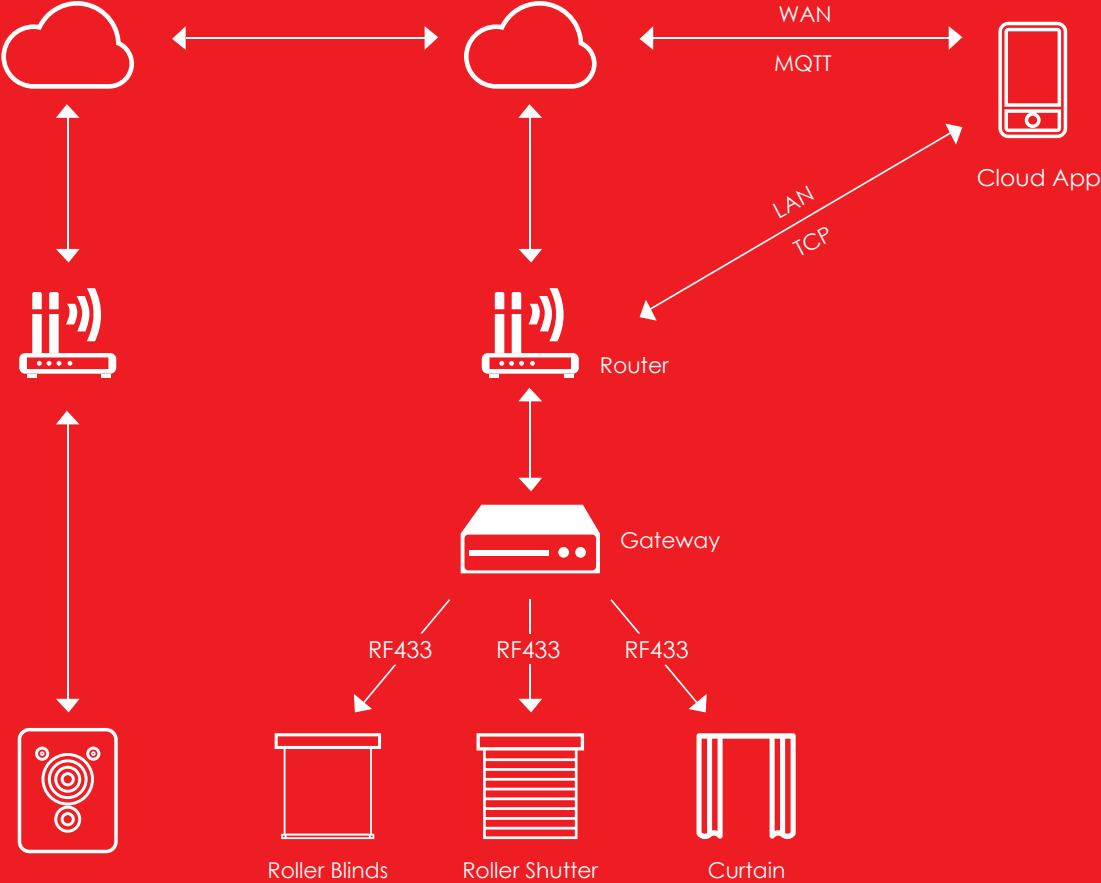

Wifi Protocol

Product Advantages


- ✔ Convenience:
Wi-Fi protocols offer great convenience in home automation by enabling seamless communication between devices. This eliminates the need for complex wiring or separate hubs, making setup and management of home automation systems simpler and more flexible.
- ✔ Linkage:
Wifi linkage of devices within an automation setup allows for seamless integration and control of various smart devices. This wireless communication ensures that devices work in harmony, providing a more efficient and streamlined smart home experience.

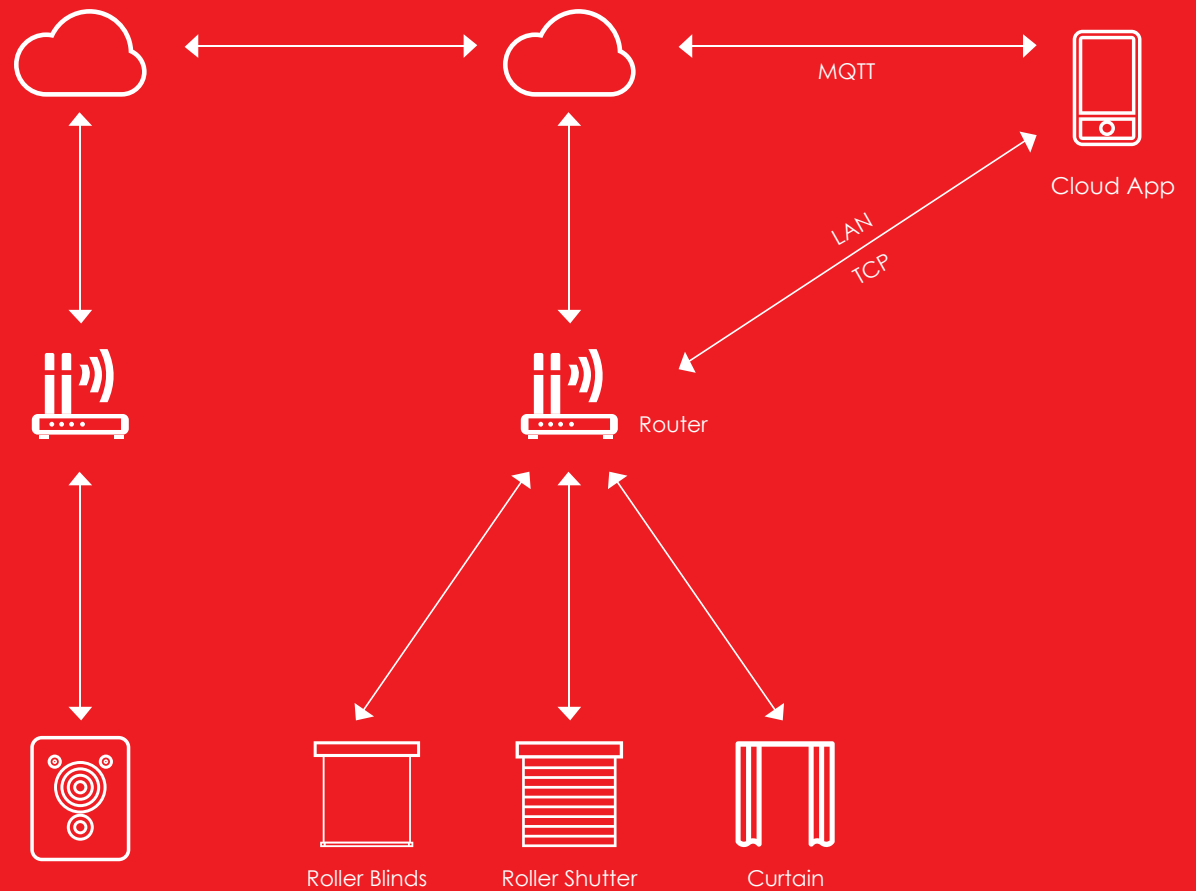

RS485 Protocol

Product Advantages


- ✔ Long-distance transmission: RS485 allows long-distance transmission, up to 120 meters, suitable for large-scale smart home projects.
- ✔ Multi-device connectivity: RS485 allows multiple devices to communicate on the same bus, allowing you to control multiple smart devices through a single bus.
- ✔ High reliability: RS485 can effectively reduce interference and bit error rate, improving the reliability and stability of communication.

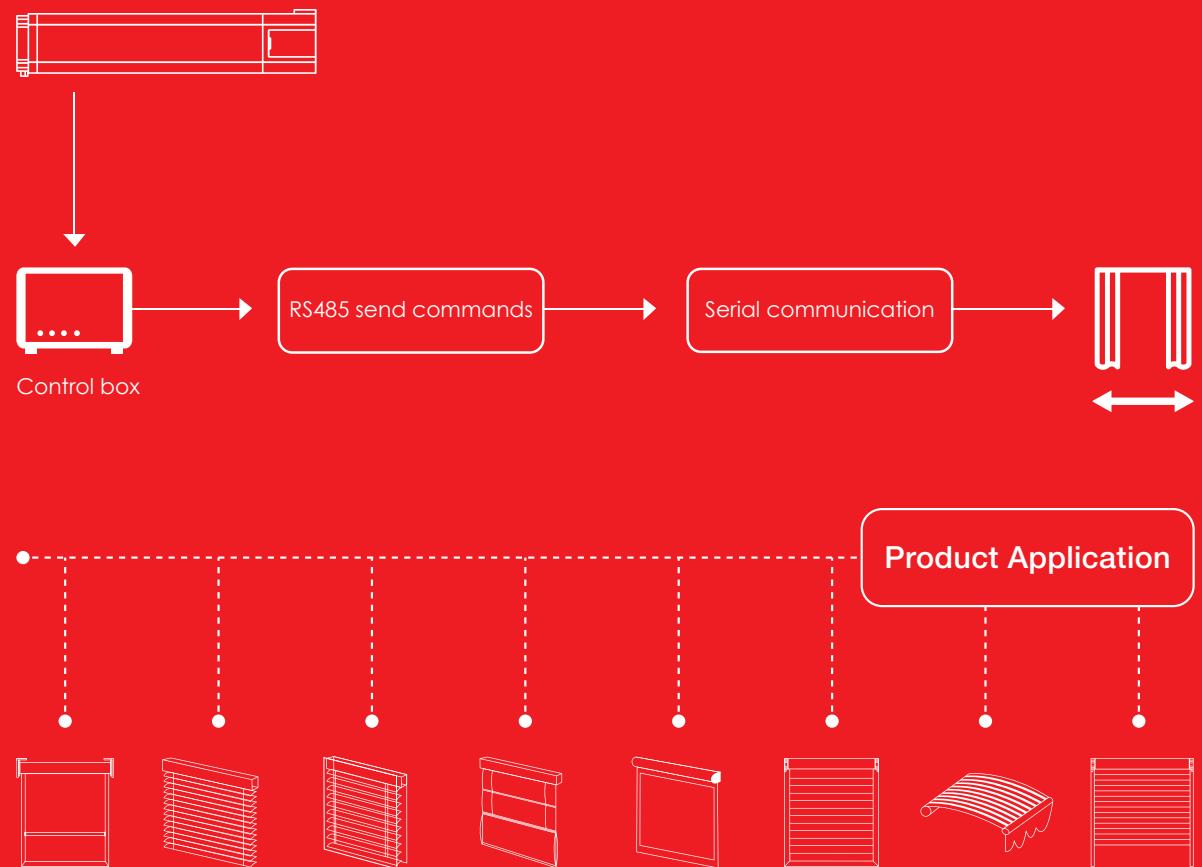

DRY CONTACT Protocol

Product Advantages

- ✔ Stable: control motors directly without using serial communication protocol.
- ✔ Long-distance transmission: dry contact allows long-distance transmission which depends on the length of wires.
- ✔ Multi-function switch: single-button rebound, double-button rebound, double-button no-rebound.

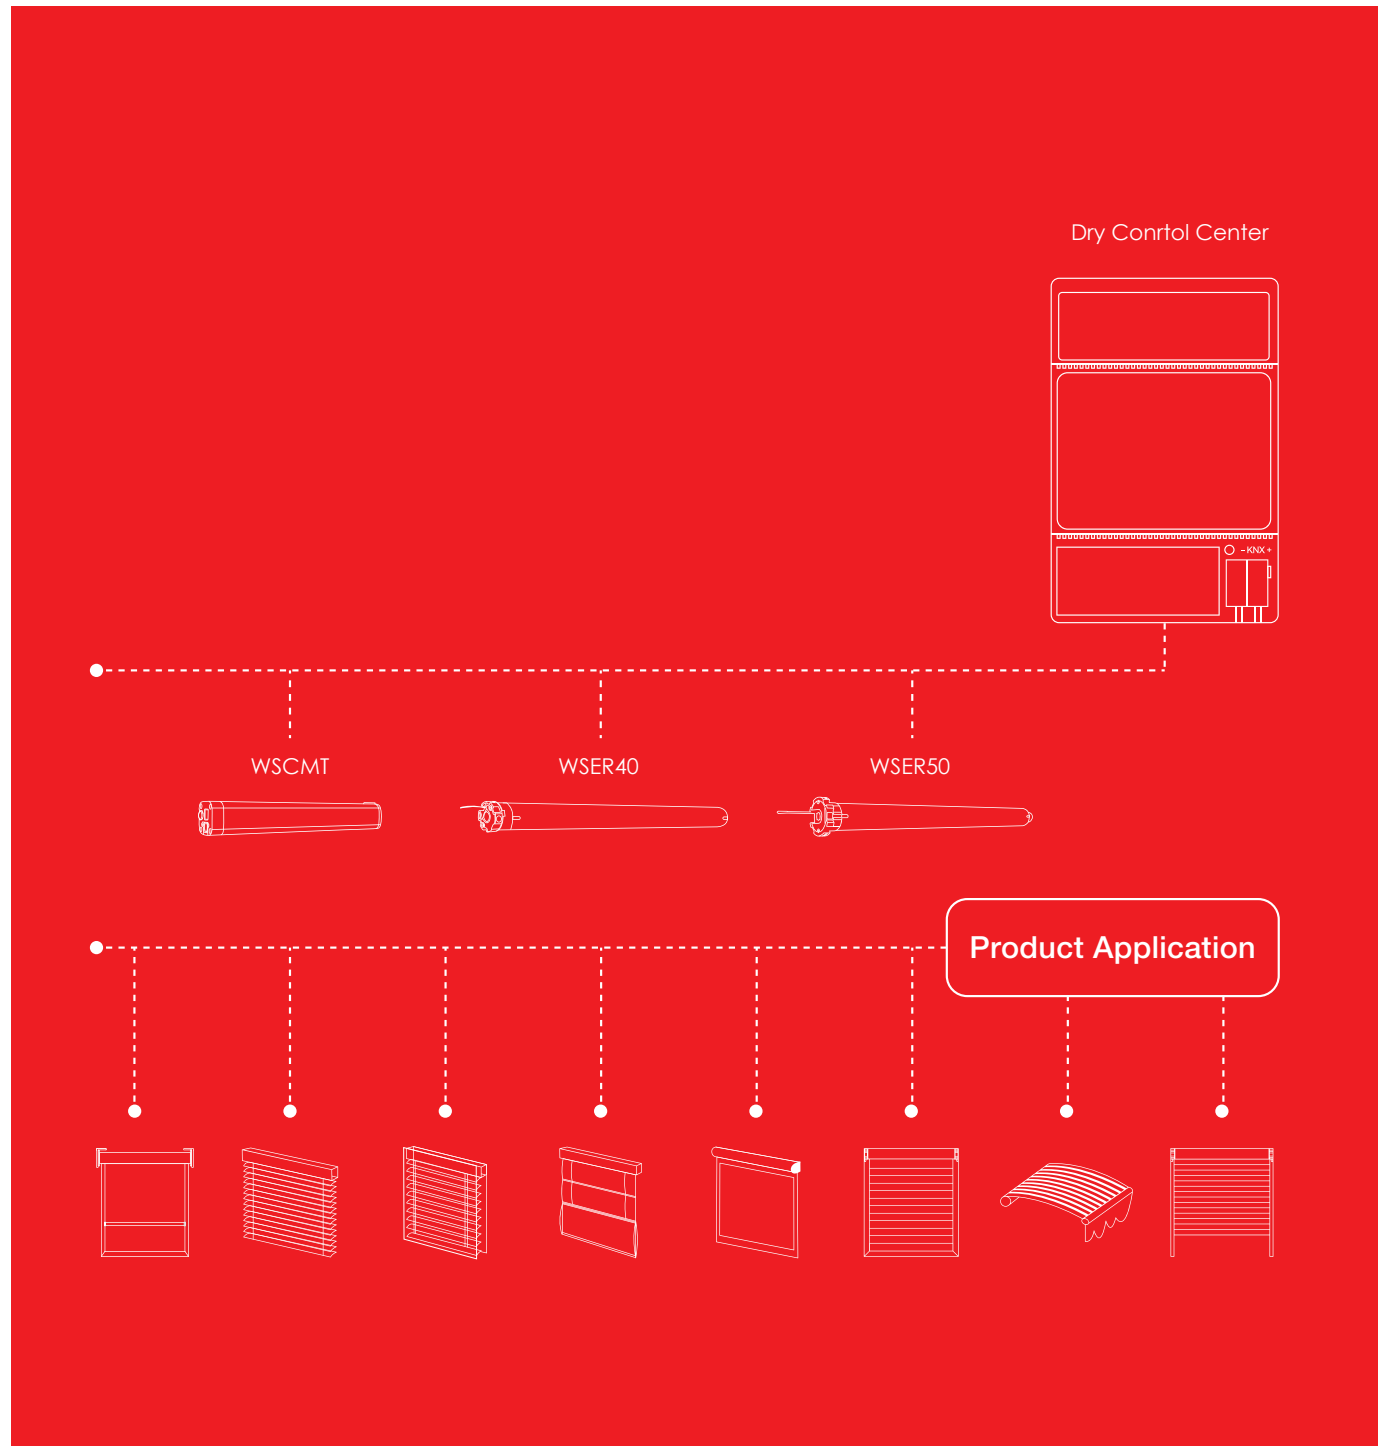



WISTAR



Prices exclude VAT

TUBULAR MOTORS			
STANDARD MOTORS		WISTAR CODE	RRP
Premo 24 1/35 Plug in	Tubular 24mm plug in motor	WSED24 AC TO DC	R2 460,00
Premo 24 1/35 Battery	Tubular 24mm Battery motor	WSER24 DA	R3 890,00
Premo 30 1/30 Battery	Tubular 30mm Battery motor.	WSER30B 1/30	R2 260,00
Premo 30 2/20 Battery	Tubular 30mm Battery motor.	WSER30B 2/20	R3 450,00
Premo 40 5/28 Battery	Tubular 35mm Battery motor.	WSER40B 5/28	R5 180,00
Premo 50 20/12 Battery	Tubular 45mm indoor battery motor.	WSER50B 20/12	R5 820,00
Selento 40 6/28 Mech	Tubular 35mm mechanical limit plug in motor.	WSEB40 6/28	R2 650,00
Selento 50 Mech 10/27	Tubular 45mm plug in motor.	WSEB50 10/27	R2 750,00
Selento 50 15/17 Mech	Tubular 45mm Mechanical Limit plug in motor.	WSEB50 15/17	R2 650,00
Selento 50 15/17 Zip Screen	Tubular 45mm outdoor zip system motor.	WSERD 50 15/17 Zip	R3 270,00
SMART MOTORS			
Premo 30 1,2/35 Matter	Tubular 30mm Battery motor with matter.	WSER30B 1/35 MATTER	R3 770,00
Selento 40 WiFi	Tubular 35mm WiFi enabled plug in motor	WSER40 - WIFI	R3 130,00
Selento 50 10/27 WiFi	Tubular 45mm WiFi enabled plug in motor.	WSER50-WIFI 10/27	R3 180,00
Selento 50 15/17 WiFi	Tubular 45mm WiFi enabled outdoor plug in motor.	WSER50-WIFI 15/17	R3 180,00
HOME AUTOMATION MOTORS			
Selento 40 6/28 5 Wire	Tubular 35mm two lives automation motor	WSEB40 5 WIRE	R3 040,00
Selento 50 10/27 5 Wire	Tubular 45mm two lives automation motor.	WSEB50 10/27 5 WIRE	R3 020,00
Selento 50 15/17 5 Wire	Tubular 45mm two lives automation outdoor motor.	WSEB50 15/17 5 WIRE	R2 920,00
CURTAIN MOTORS			
STANDARD MOTOR			
Tenda 70 Wired	Curtain 70Kg Plug in motor	WSCMT	R2 470,00
SMART MOTORS			
Tenda 70 WiFi	Curtain 70Kg WiFi enabled curtain motor.	WSCMQ WIFI	R2 920,00
Tenda 70 Battery	Curtain 70Kg Battery Zigbee enabled motor.	WSCMI Zigbee	R4 070,00
HOME AUTOMATION MOTORS			
Tenda 70 5 Wire	Curtain 70Kg Two lives automation motor.	WSCMT-5	R2 550,00
Tenda 70 Wired RS485	Curtain 70Kg Plug in motor with dry contact function.	WSCMT DCT	R2 470,00
VERTICAL SMART MOTOR			
Aurora	Vertical 35Kg WiFi enabled Plug in motor	WSMCXH Aurora	R4 250,00

PANEL BLIND MOTORISATION			
Tenda 70 Wired	Curtain 70Kg Plug in motor	WSCMT	R2 470,00
End cap for motor	End cap set per blind		R1 020,00
Panel Belt	Width x 2	Per M	R275,00

SMART HOME CONNECTIVITY			
Centro Gateway	Tuya WiFi Gateway	GW03	R1 450,00
Zigbee Gateway	Zigbee gateway	Zigbee Gateway	R1 630,00

TRANSMITTERS & ACCESSORIES			
STANDARD EMMITTERS			RRP
Amano 5 Channel	5 Channel Emitter	WSRE302	R660,00
Amano 4 Timer	4 Channel Timer Emitter	WSRE302 4T	R1 010,00
Amano 16 Channel	16 Channel Emitter	WSRE302 16C	R1 290,00
PREMIUM EMMITTERS			
Leggero 1 Channel	1 Channel Premium Emitter	WSXE301	R480,00
Liscia 4 channel	4 Channel Premium Emitter	WSXE302	R590,00
Liscia 16 channel	16 Channel Premium Emitter	WSXE302 16C	R880,00
Liscia 4 Timer	4 Channel Timer Premium Emitter	WSXE302 4T	R960,00
SPECIALITY EMMITTERS			
Amano 2 Variation	2 Channel Variation emitter	WSRE702V	R1 030,00
Amano 5 Variation	5 Channel Variation emitter	WSRE703V	R1 240,00
Fesso 2 Channel	2 Channel wall-mounted emitter	WSRE202	R810,00
Fesso 8 Channel	8 Channel wall-mounted emitter	WSRE203 8C	R1 190,00

Charger for DC Motor	R490,00
Extention cable for USB Motor	R150,00
Extention cable for DC motor	R150,00
Power Surge Plug	R170,00
Extention cable for wired motor	R80,00
DCB007	R1 365,00
Solar Panel for battery motor	R1 440,00



 **TBS** TEXTILES & COMPONENTS

6 Eagle Road, Verulam, Kwa-zulu Natal, South Africa, 4020

Email: Info@wistar.co.za for more information



